




SMART track

Sliding door hardware
For wood and glass doors
Up to 330 lbs door weight

Features-Advantages

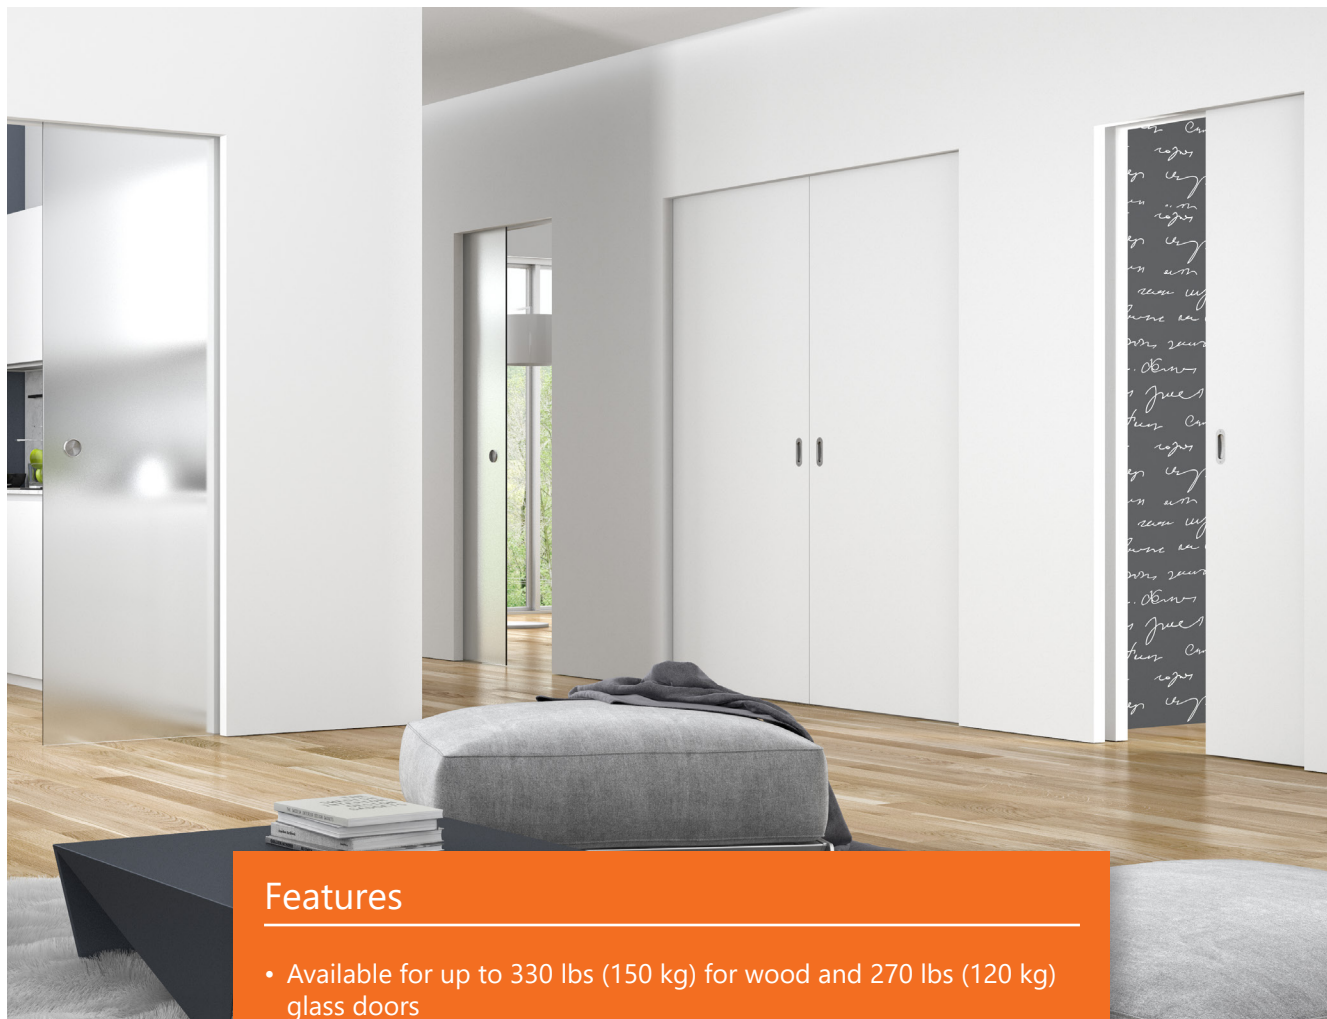

Features


- Available for up to 330 lbs (150 kg) for wood and 270 lbs (120 kg) glass doors
- Soft-Stop, Push-To-Open, Triple-Action Push-Two-Soft and Synchro available
- Optional recessed hardware for wood doors and glass clamps with valance for more clearance height
- Optional wall mounting profile
- Aluminium valances to clip on the track profile

Advantages


- Compatible with different door widths
- Quick and easy door installation and adjustment after track/wall install
- Exchange components without opening the finished wall
- Due to the wheel sets there is only a minimal friction and a smooth movement guaranteed
- The SMARTtrack can be customized in every detail to individual needs. Even when installed!

Technical features

Basic sliding door hardware set for one wood door panel

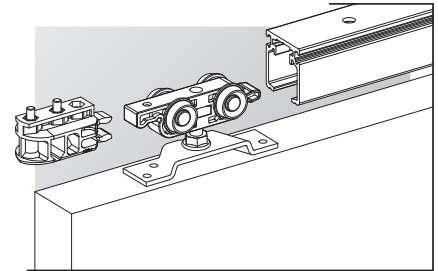


Wheel set and stopper - two pieces per door. The wheel bracket is mounted to the door panel, the stopper to the track. The door can be removed and attached while the track remains installed.

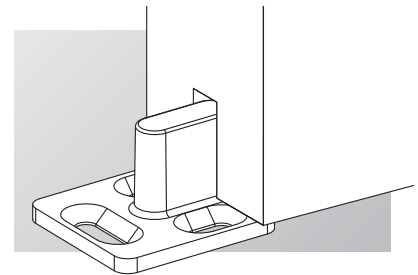


Floor guide - for wood doors, screwed into or glued to the floor.

- For ceiling mounting.
- Available in standard lengths 78 ¾" (2000 mm) & 118 ½" (3000 mm) and custom lengths up to 19' 8 ¼" (6000 mm).
- Up to 330 lbs door weight.
- For door panels with a thickness of 1 ¾" (35 mm) and up.
- For door widths from 24" (610 mm).

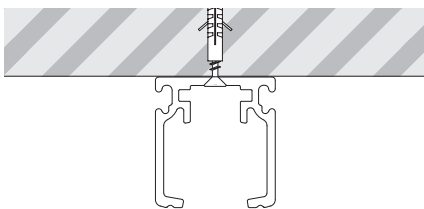

Track for ceiling mounting includes access opening for adjustment.

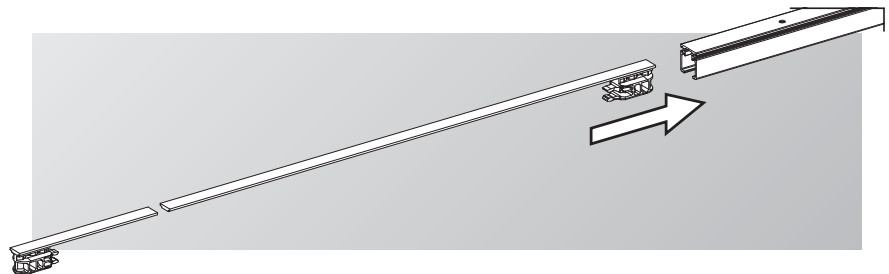


Stopper adjustment mechanism for easy adjustment or replacement of stoppers when installed. The finished wall does not need to be opened.


Glass clamp set for glass doors



- Accessory set for tempered glass and laminated safety glass
- Suitable for $\frac{3}{8}$ " (10/10.76 mm) and $\frac{1}{2}$ " (12/12.76) glass thickness.
- Up to 270 lbs door weight.
- Floor guide with similar to stainless steel or black finish.

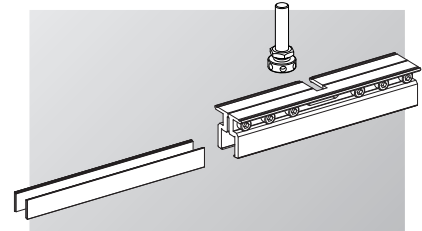


Converting the basic wheel set to glass doors
- two glass clamps with slide-in clamping pads for different glass thicknesses and two height adjustment screws.

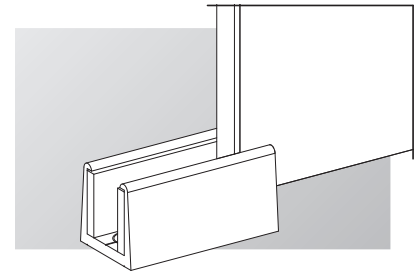

Floor guide - for glass doors, screwed into the floor.


Technical features

Recessed wood door mounts

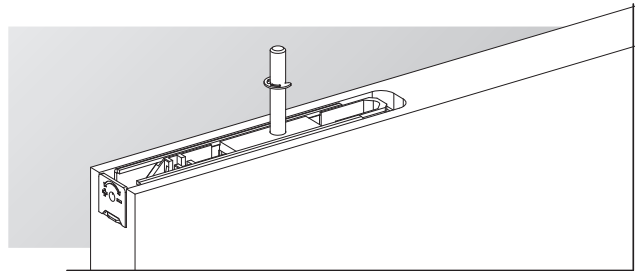


- The basic hardware set for wood sliding doors can also be combined with a recessed door mount.
- Up to 270 lbs door weight.
- No maintenance valance required while maintaining minimal clearance to the track/header.

Glass clamp set with valance

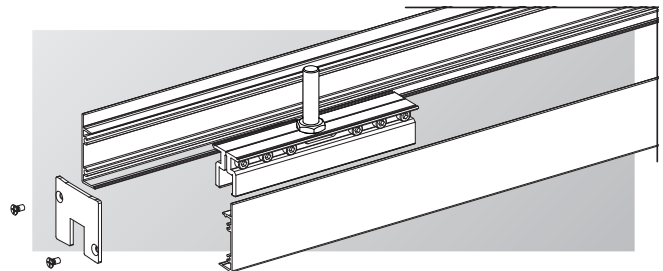


- The basic hardware set for wood sliding doors can also be combined with glass clamps with valance.
- Up to 270 lbs door weight.



Wall mounting profile

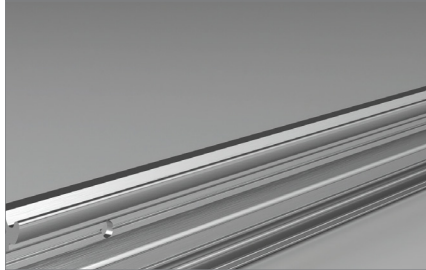

- Aluminium profile for wall mounting.
- The track is just clipped onto the wall mounting profile.
- Up to 180 lbs door weight.

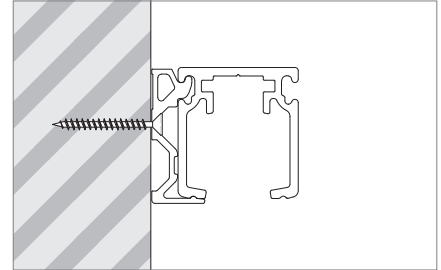



Valance profile for wood doors

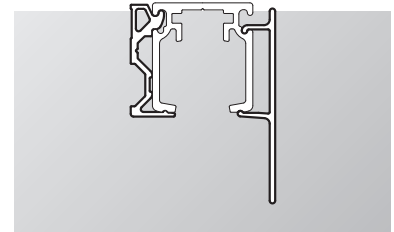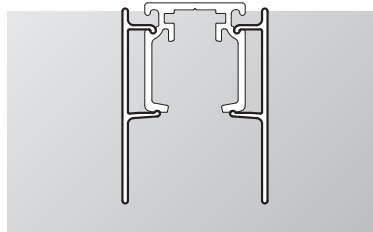

- Mounts to top track
- On-site finishing not required
- Matte aluminum, brushed nickel or black finishes
- Including two end caps for the sides

Valance profile - double sided mounting for ceiling mounted systems, single side mounting for wall mounted systems

Valance profile for glass doors

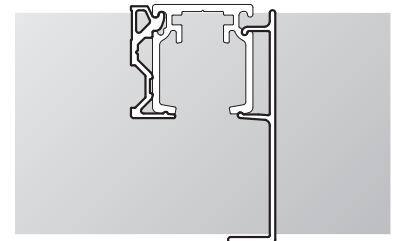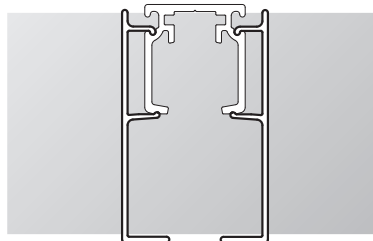

- Mounts to top track
- On-site finishing not required
- Aluminum, stainless steel or black look
- Including two end caps for the sides

Valance profile - double sided mounting for ceiling mounted systems, single side mounting for wall mounted systems


Technical features

Push-Two-Soft




- Damper with Soft-Close/Soft-Open + Push-To-Open in one device
- For doors starting at 24"
- Options up to 135 lbs and 180 lbs

Soft-Stop

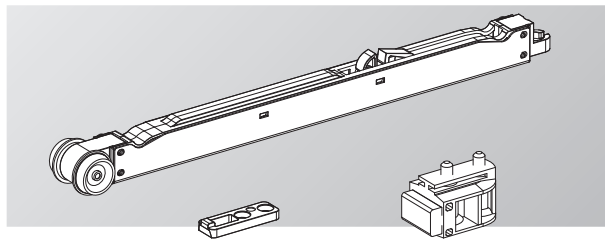


- For gentle door closing and opening
- Maximum weight of 180 lbs
- Minimum door width of 24" (610 mm) when used on one side
- Minimum door width of 34" (860 mm) when used on both sides

Push-To-Open

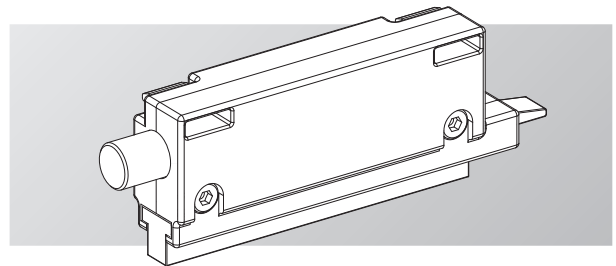


- For mounting on the pocket side of the track
- Maximum weight of 180 lbs
- Minimum door width of 24" (610 mm)
- Can be combined with one-sided soft close on the passage side when the door is at least 26" (660 mm) wide

Synchro for wood doors

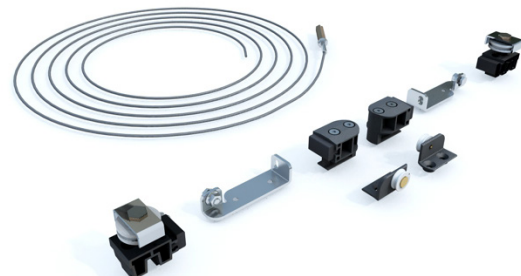


- Both doors can open and close simultaneously using a cable
- For two wood doors up to 180 lbs per door panel
- Comfortable operation with one hand
- Minimum door width of 20"
- Optional Soft-Closing and Opening starting at 24" and up to 90 lbs

Sliding track connector

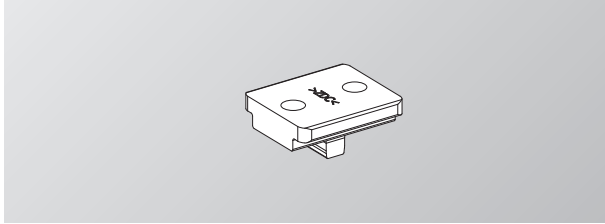

- For a comfortable alignment of two sliding tracks to install double panel sliding doors (biparting).

Heavy-duty wheel set

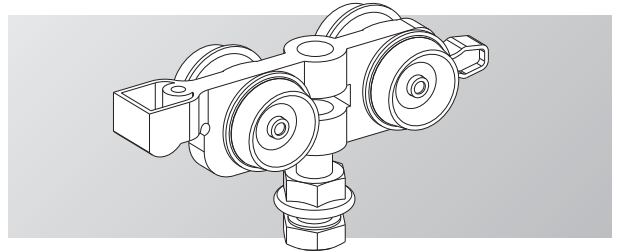


- Heavy duty zinc die cast wheel set for door weights up to 330 lbs if no other weight limiting accessories are used


Drawings and formulas

Sliding door hardware for wood doors

Side view

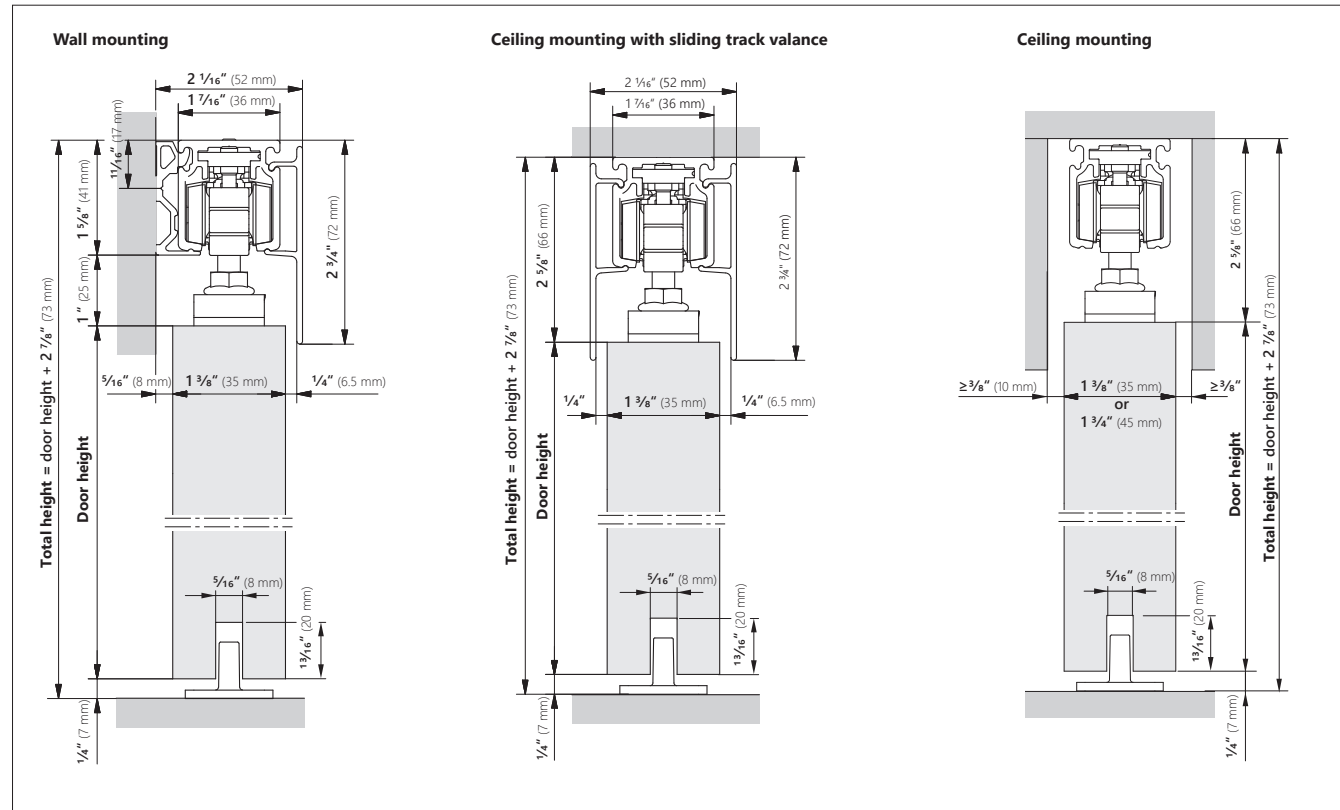


Front view

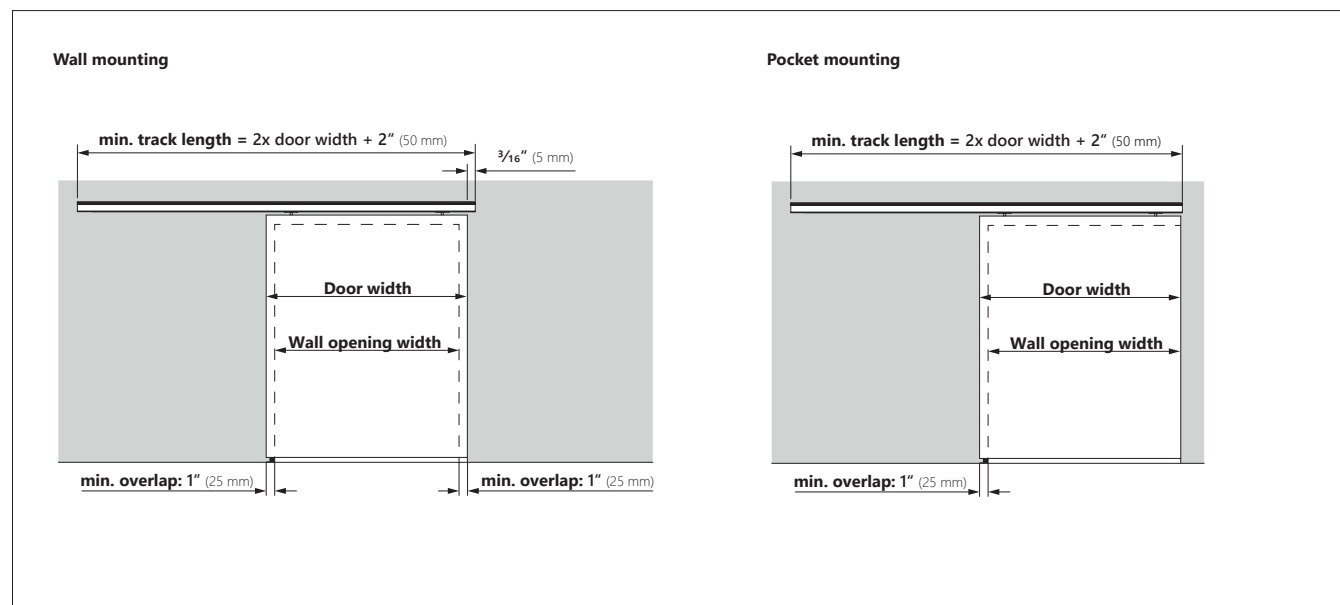


Sliding door hardware with recessed wood door mount

Side view

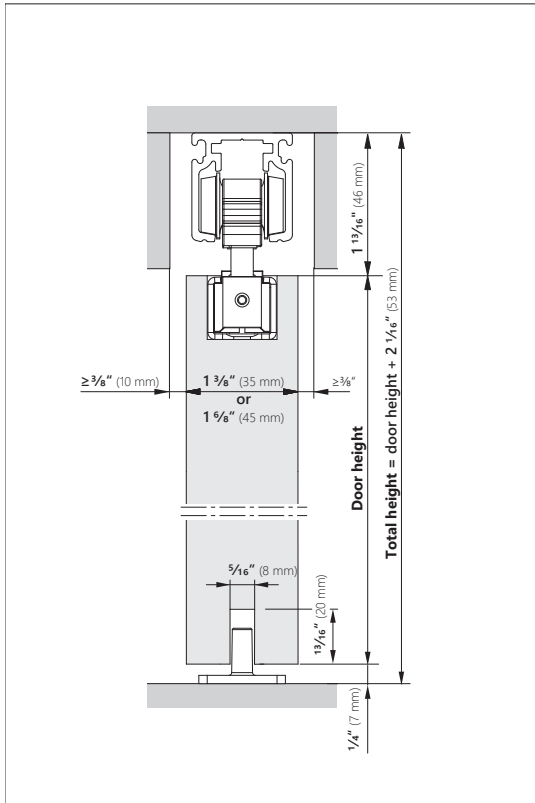


Front view

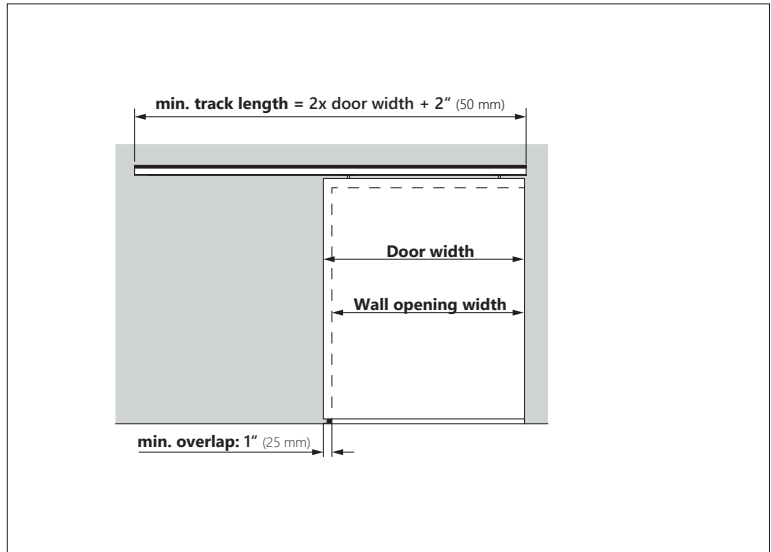


Drawings and formulas

Sliding door hardware with glass clamps

Side view

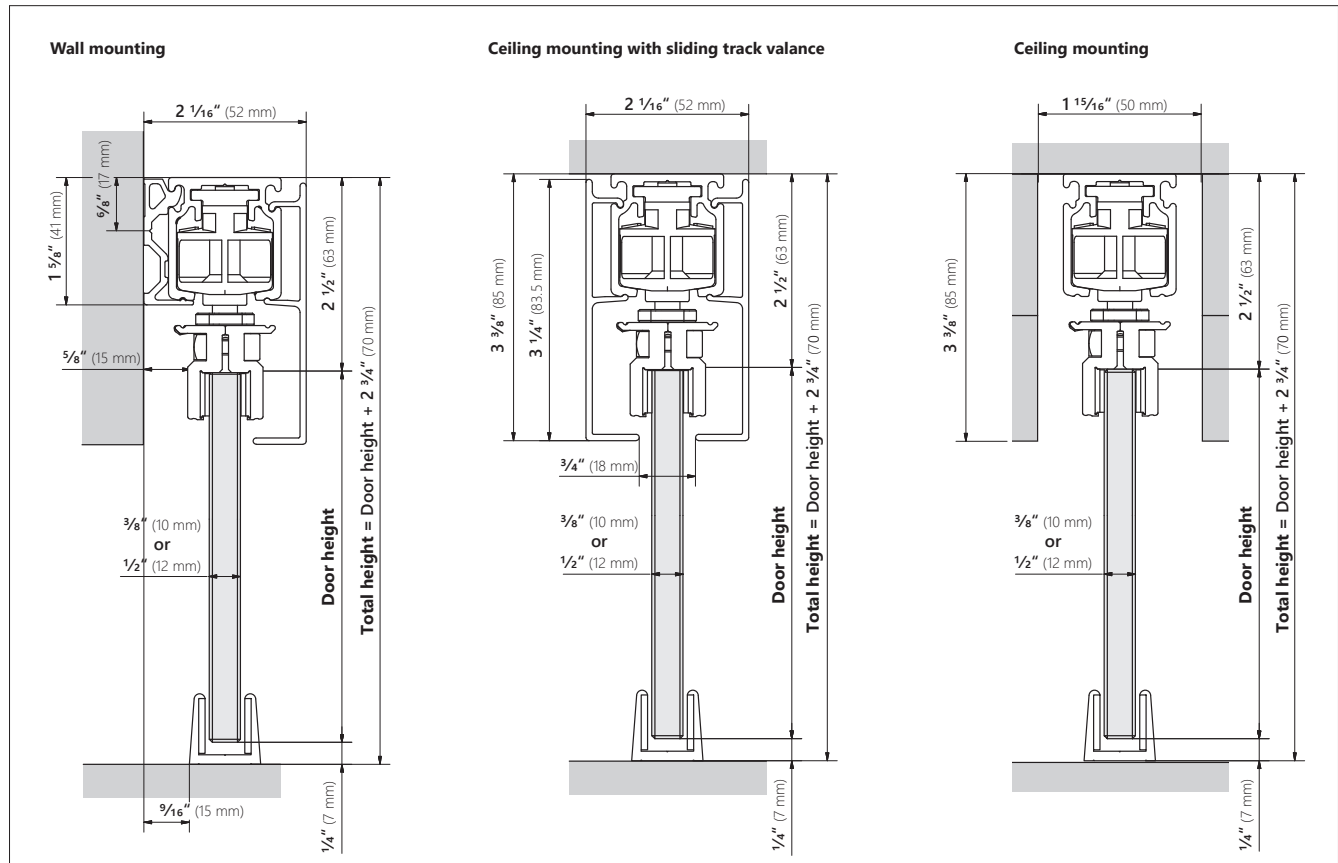


Front view

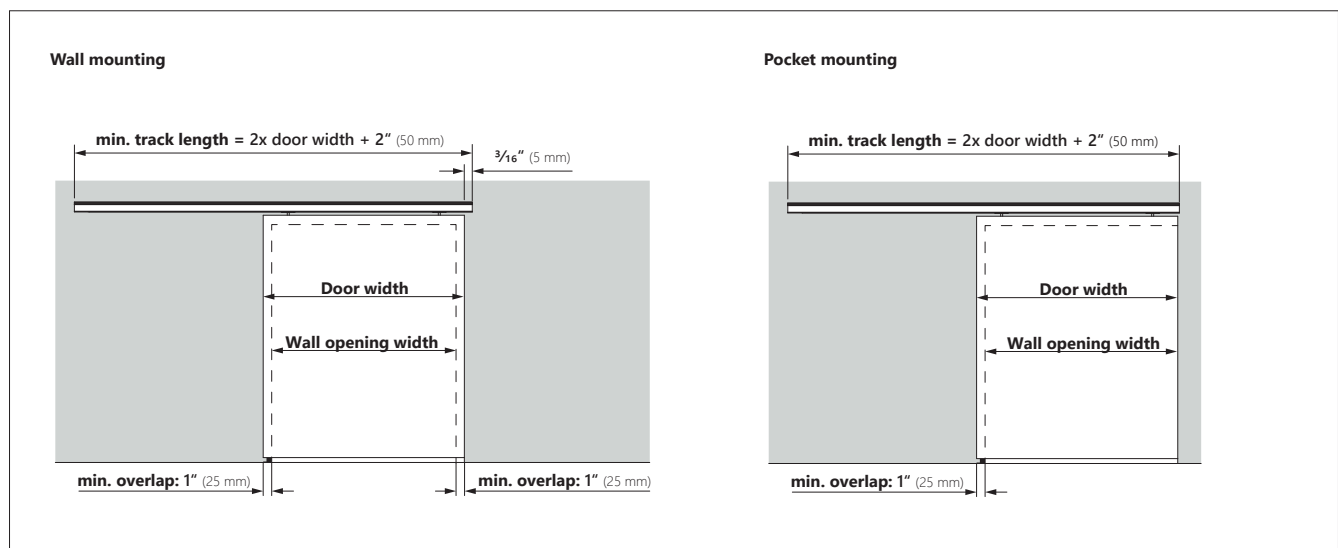


Sliding door hardware with glass door and clamps with valance


Side view

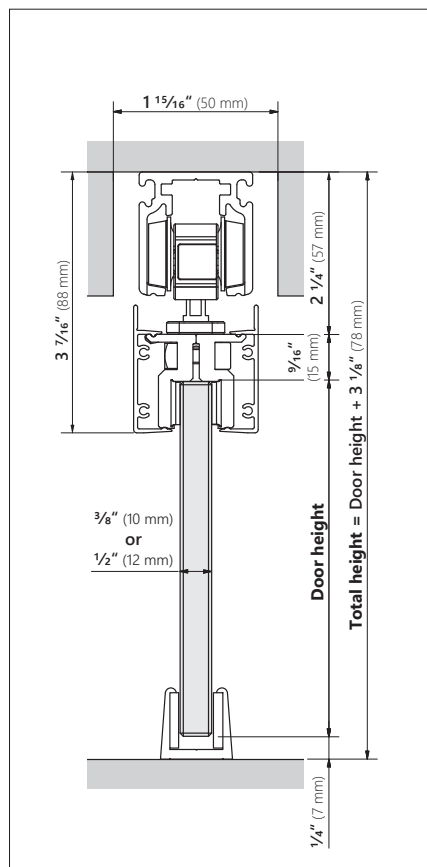

Front view

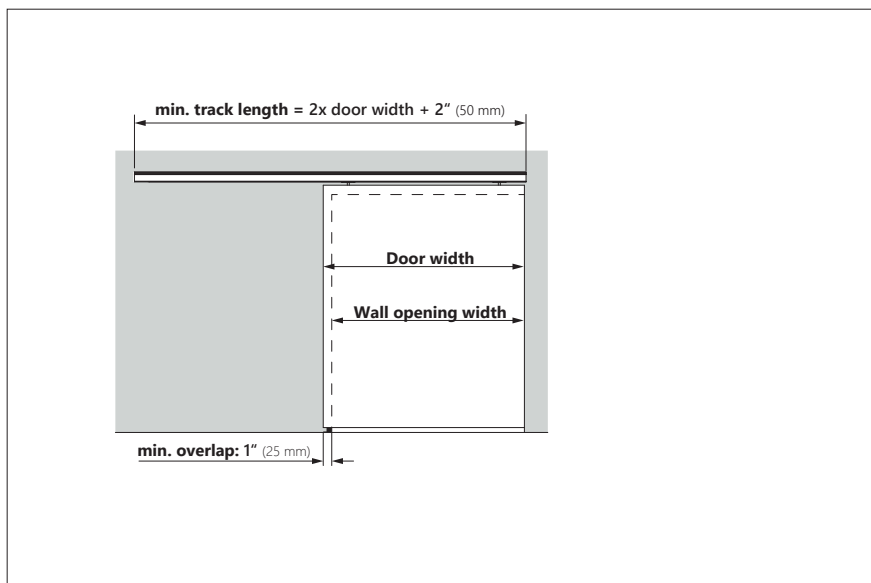


Make some notes

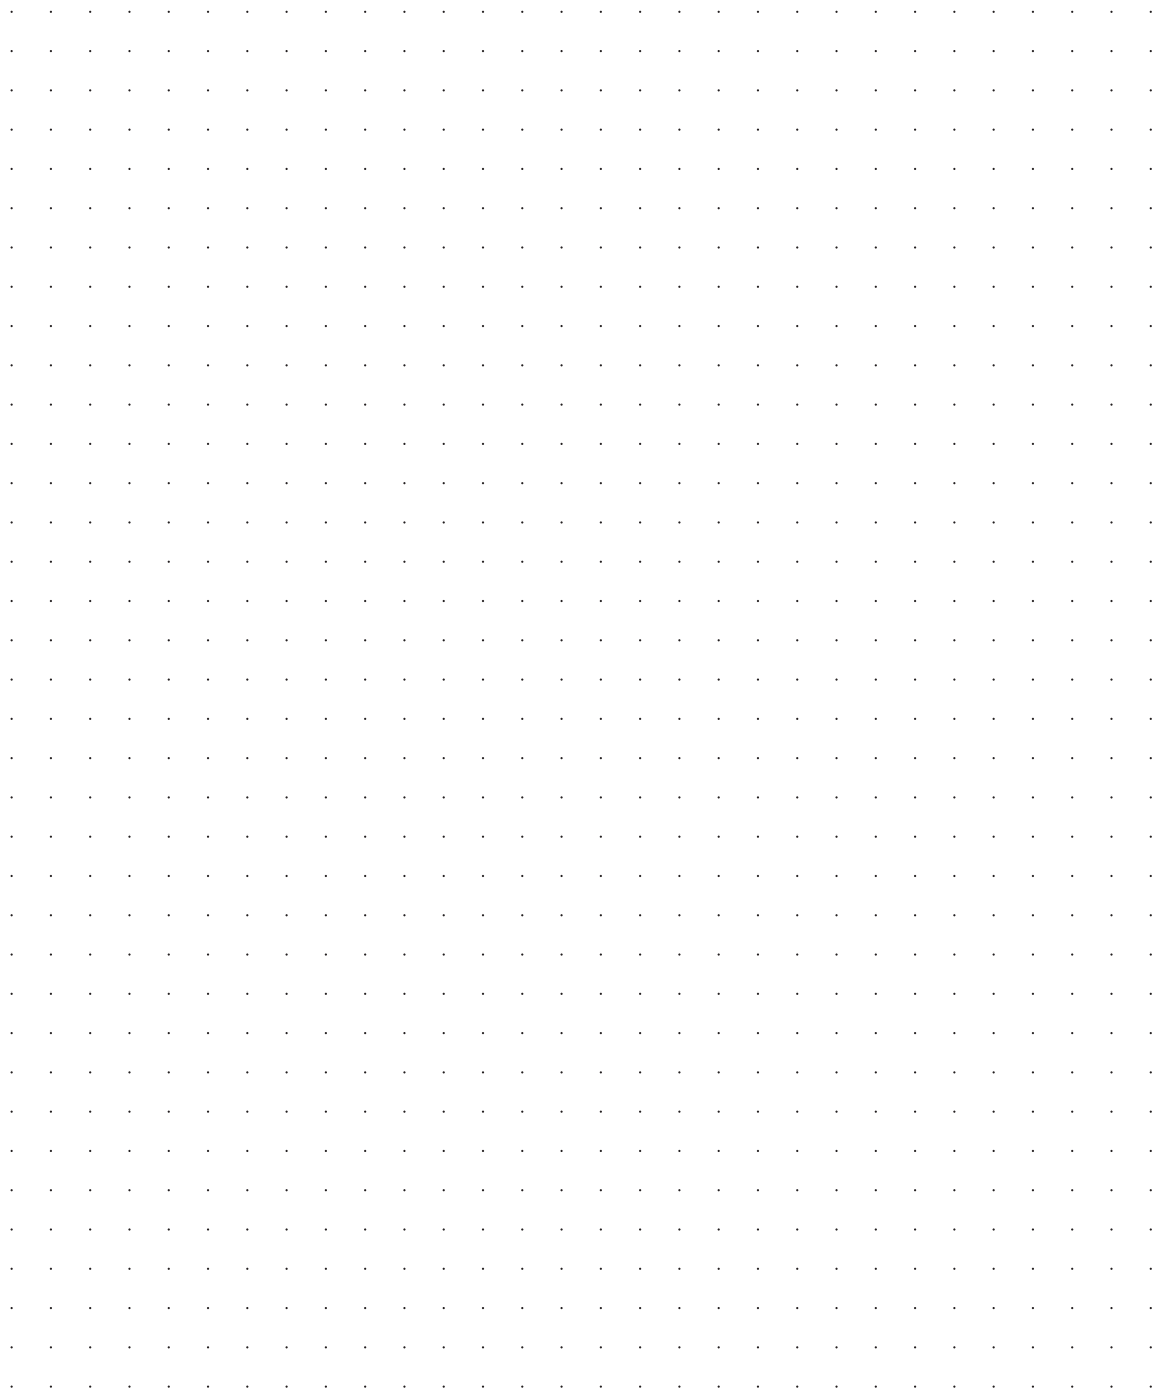A large grid of dots for taking notes, consisting of 20 rows and 40 columns of small, evenly spaced dots.

Make some notes

A large grid of dots for taking notes. The grid consists of 20 columns and 30 rows of small, evenly spaced dots, providing a structured space for writing or drawing.

Make some notes

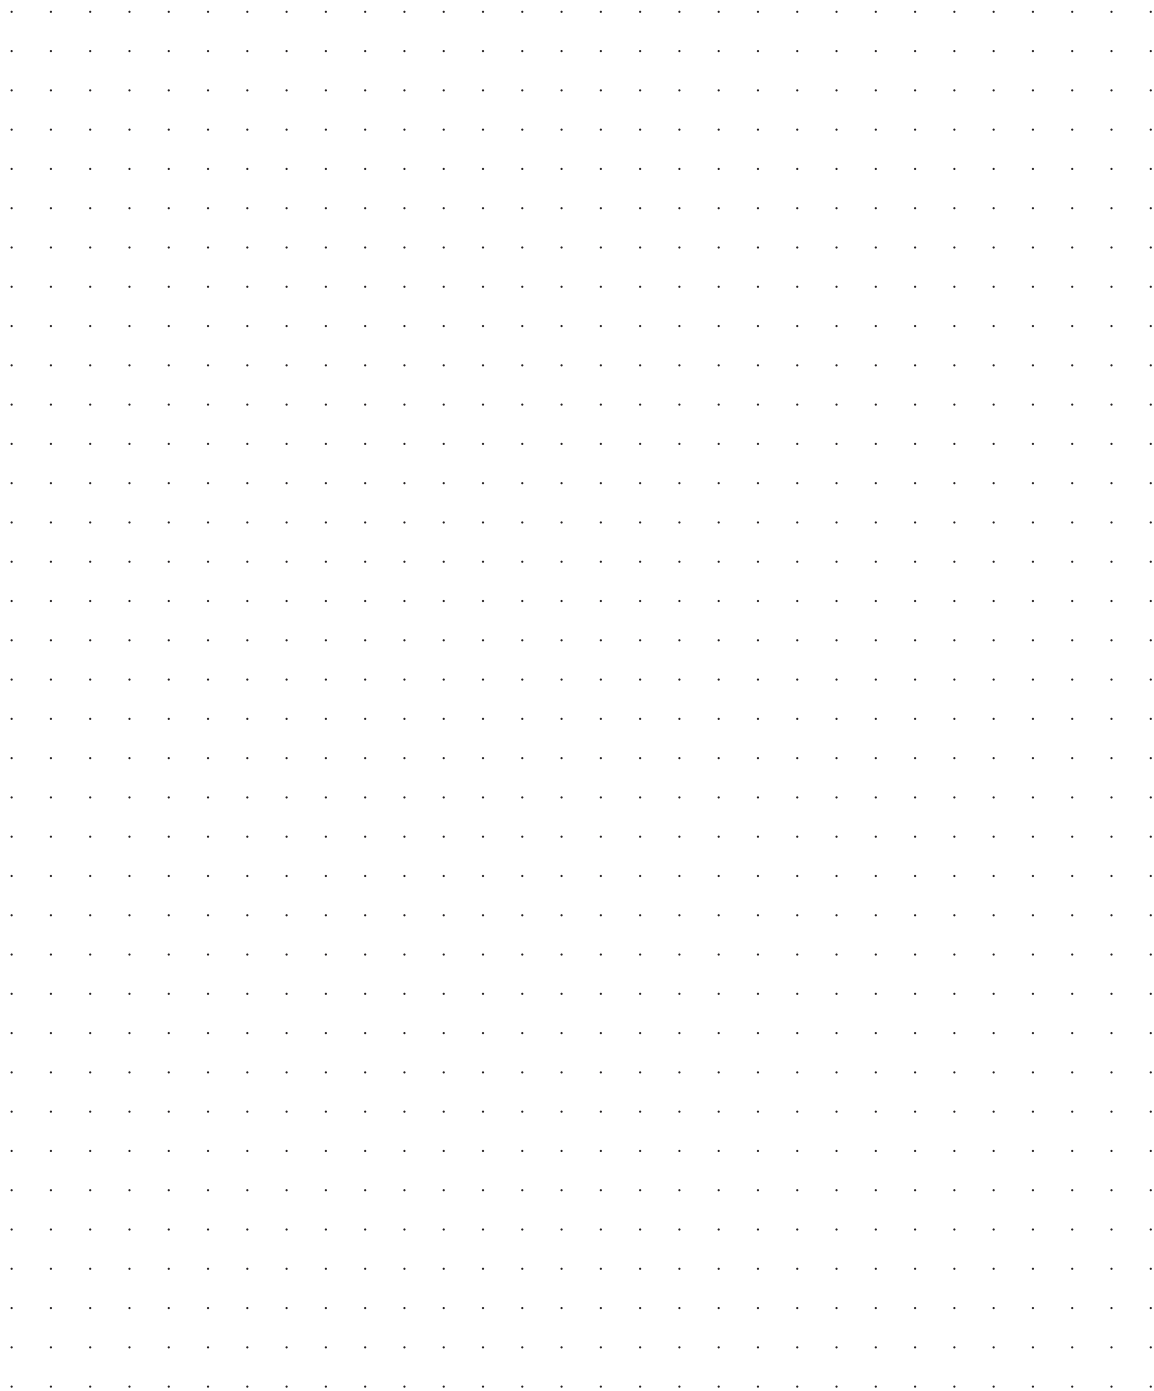A large grid of dots for taking notes, consisting of 20 rows and 40 columns of small, evenly spaced dots.



A brand of Diviwerk LLC

Dania Beach, FL 33004

PH: 786-791-8557

E: sales@falkenstein-doors.com

01/2026